

RBC Precision Products

Dowel Pins, Loose Needle Rollers, Shafts



- Precision Ground Steel and Stainless Steel Pins, Rollers, and Shafts
- Knurls, Grooves, Trunnions, Undercuts, Plating, and Coatings
- End Types Spherical, Flat with Corner Break, Ground, Chamfer



ISO 9001:2000

www.rbcbearings.com 574.546.4455





Small and Standard Loose Needle Rollers and Precision Rollers



• Diameter: .031 to 1.250 inch

.787 to 31.750 mm

• Length: .125 to 8.000 inch

3.17 to 203.20 mm

• Available in inch and metric sizes

• Superior roundness and finish

• Typical materials: 52100, 8620, 440C, M50

• Other materials available



Typical Applications









Bearings

Planetary Gear Sets

Overrunning Clutches

Engine Tappet Rollers



Flat Ends with Corner Break

Precision Ground Ends

Spherical Ends







Motor Shafts, Rails, and Machined Components



Sub-Fractional Horsepower Motor Shafts



Rails and Large Shafts



Machined, Knurled, and Ground Shafts




 Materials: 52100, 8620, 4140 Stainless Low Carbon and other alloys

Diameter: Up to 1.2500 inchLength: Up to 8.0000 inch

Diameter to Length Capability

Shortest to longest length for a given diameter

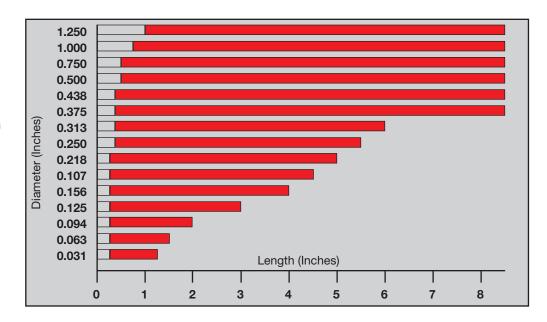

ISO 9001:2000







Gear Pins, Dowels, Locating Pins, and Precision Swiss Components



Typical Materials

- 52100 Low Carbon Steel
- Stainless 302/303/304 316, 416, 420, 440C



Typical Applications Gear Boxes Plate Spacers Motor Pins



Diameter: .031 to 1.250 inchLength: .156 to 8.000 inch

• Available in inch and metric sizes

• Coatings and plating available

www.rbcbearings.com 574.546.4455







Large Rollers, Wrist & Planet Pins, Plated/Coated Pins & Rollers



• Materials: 52100, 8620, 4140 Stainless

Diameter: Up to 1.250 inchLength: Up to 8.000 inch



Typical Applications Roller Alignment Crank Pins Pins



Typical Coatings

- Black Oxide
- Manganese Phosphate
- Zinc Dichromate
- Electroless Nickel
- Oil
- Others as Required



ISO 9001:2000

www.rbcbearings.com 574.546.4455







Innovation. Commitment. Quality.

RBC has been producing bearings in the USA since 1919. In addition to unique custom bearings, RBC offers a full line of standard industrial and aerospace bearings, including:



Spherical Plain Bearings

Radial, angular contact, extended inner ring, high misalignment. QuadLube®, ImpactTuff®, SpreadLock® Seal, CrossLube®, DuraLube™, and self-lubricating bearings. Available in inch and metric sizes.



Thin Section Ball Bearings

Standard cross sections to one inch. Sizes to 40 inches. Stainless steel and other materials are available. Seals are avaliable on all sizes and standard cross sections. Super duplex configurations. Inch and metric.



Tapered Roller Bearings

Tyson® case-hardened and throughhardened tapered roller bearings. Available in many sizes. Used in Class 8 heavy truck and trailer wheel bearings, gearboxes, and final drive transmissions.



Tapered Roller Thrust Bearings

Case-hardened. Sealed and unsealed for truck, tractor, and construction equipment steer axles, and Class 8 trailer landing gear.



Integrated Assemblies

For robots and other process tool applications. Engineering design assistance. Production volume capacity.



Cam Followers

Standard stud, heavy stud, yoke type, caged roller followers. Patented RBC Roller® cylindrical roller cam followers, HexLube® universal cam followers, airframe track rollers.



Needle Roller Bearings

Pitchlign® caged heavy duty needle roller bearings, inner rings, TJ TandemRoller® bearinas for long life.



Self-Lubricating Bearings

Radial, thrust, rod ends, spherical bearings, high temperature, high loads. Available in inch and metric sizes. Fiberglide® self-lubricating bearings.



Airframe Control Bearings

Ball bearing types, self-lubricating types, needle roller track rollers.



Dowel Pins, Loose Needle Rollers, Shafts

Precision Products dowel pins, loose needle rollers, and shafts.



Commercial Rod Ends

Commercial and industrial, precision, Mil-Spec series, self-lubricating, and aircraft. Sold under the Heim®, Unibal®, and Spherco® names. Available in inch and metric sizes



Large Ball and Cylindrical Roller Bearings

Ball and cylindrical roller bearings up to 60 in. (1.5 m) O.D. Tapered roller and tapered roller thrust bearings up to 36 in. (9.1 m) O.D. Slewing rings up to 169 in. (4.3 m) O.D.



Ball Bearings

Precision ground, semiground, unground. High loads, long life, smooth operation. Nice® branded products are offered in caged and full complement configurations.



Specials

RBC manufactures many specialty bearings for the aerospace, oil and energy, semiconductor equipment, packaging, transportation, and other industries.



ISO 9001:2000

www.rbcbearings.com 574.546.4455

This document contains a general overview of the products and features described herein. It is solely for informational purposes, does not represent a warranty of the information contained herein, and is not to be construed as an offer to sell or a solicitation to buy. Contact RBC Bearings for detailed information suitable to your specific applications. RBC Bearings reserves the right to modify its products and related product information at any time without prior notice. Some of the products listed herein may be covered by one or more issued and pending U.S. or foreign patents. Contact RBC Bearings for product specific information.

© 2008, 2009 RBC Bearings Incorporated. All rights reserved.



