


TRITAN SAF COMPLETE UNIT SPECIFICATIONS

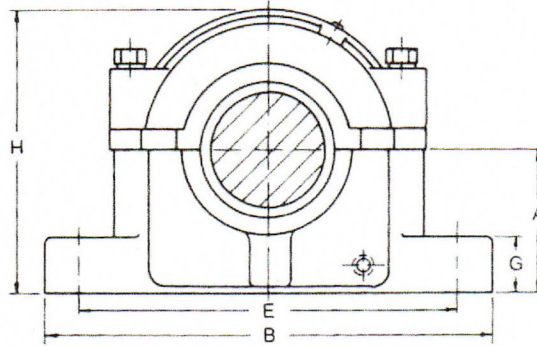

SAF Split Housings are used with spherical roller bearings where there are moderate to heavy load requirements...

Housings are made of ISO Grade 200 (US Grade 30) cast iron, meeting the ISO113 - 1994 standards. Features of these housings include threaded holes for grease nipple on top and drain plug on bottom front face. Bottom has webs for heat transfer and ribs to help prevent deformation from over tightening. TRITAN housings are supplied with LER seals and stab rings.

SAF 22500 SERIES

Housing #	A INCHES	B INCHES	E MAX IN.	E MIN IN.	G INCHES	H INCHES	ADAPTOR	BEARING #	LOAD	LOAD
									RATINGS	RATINGS
									STATIC - KN	DYNAMIC - KN
SAF 515	3 1/4	11 1/4	9 5/8	8 5/8	1 1/8	6 3/8	H315 X 2 7/16	22215KMC3W33	163	215
SAF 517	3 3/4	13	11	9 7/8	1 1/4	7 5/16	H317 X 2 15/16	22217KMC3W33	213	282
SAF 520	4 1/2	15 1/4	13 1/8	11 5/8	1 3/4	8 3/4	H320 X 3 7/16	22220KMC3W33	316	435
SAF 522	4 15/16	16 1/2	14 1/2	12 5/8	2	9 5/8	H322 X 3 15/16	22222KMC3W33	410	588
SAF 526	6	18 3/8	16	14 5/8	2 3/8	11 1/2	H3126 X 4 7/16	22226KMC3W33	562	832
SAF 258	6	20 1/8	17 1/8	16	2 3/8	11 3/4	H3128 X 4 15/16	22228KMC3W33	640	955
SAF 532	6 11/16	22	19 1/4	17 3/8	2 5/8	13 5/16	H3132 X 5 7/16	22232KMC3W33	921	1290
SAF 534	7 1/16	24 3/4	21 5/8	19 1/4	2 3/4	14 3/16	H3134 X 5 15/16	22234KMCW33	975	1500
SAF 536	7 1/2	26 3/4	23 5/8	20 7/8	3	14 7/16	H3136 X 6 7/16	22236KMC3W33	1010	1590
SAF 538	7 7/8	28	24 3/8	21 5/8	3 1/8	15 11/16	H3138 X 6 15/16	22238KMC3W33	1595	5490
SAF 544	9 1/2	32 3/4	27 7/8	24 3/4	Mar-34	18 5/8	H3144 X 7 15/16	22244KMC3W33	2287	3220